



## WIRING INFORMATION

04963-800
94963-800

### Internal schematic

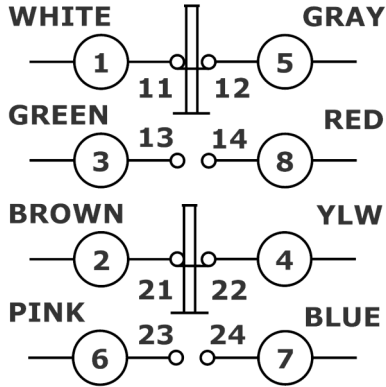

### M12



**8 Pin  
A code  
Male**

Pin	Color
1	White
2	Brown
3	Green
4	Yellow
5	Gray
6	Pink
7	Blue
8	Red

Utilize Female M12 A code cordset for mating connection. Contact factory for additional information.

Catalog Number	M12	Pilot Light	Switch Color	11-12 (NC) Pins		21-22 (NC) Pins		13-14 (NO) Pins		23-24 (NO) Pins		Rating	Notes
				①	⑤	②	④	③	⑧	⑥	⑦		
04963-800	8P	none	Yellow	White	Gray	Brown	Yellow	Green	Red	Pink	Blue	30V 2A Max.	
94963-800			White										

#### **Warning - Danger**

These products should only be used where point-of operation guarding devices have been properly installed and maintained so that all appropriate OSHA and ANSI regulations and standards are met. Misapplication of these products on machinery lacking effective point-of-operation safeguards can cause serious injury to the operator of that machinery.

#### **AVERTISSEMENT - DANGER**

Ces produit doivent seulement être utilisés sur des postes à risque correctement sécurisés et entretenus afin d'être conforme aux standards et réglementations en vigueur (CSA, CLC). Un mauvais usage de ces produits sur des machines et des postes de travail non sécurisés de manière efficace peut causer des blessures graves au technicien maniant ces machines.

**REES, Inc. Fremont, IN 46737 260-495-9811 FAX 260-495-2186 [www.reesinc.com](http://www.reesinc.com)**

04852-840 092221